




Bubblemat


Smart anti-fatigue mat with a distinctive bubbled surface




- Raised bubble patterned surface stimulates feet and legs to aid circulation.
- Underfoot cushioning also makes prolonged occupational standing more comfortable.
- A choice of materials depending on the demands of the environment (dry use only).
- Complete mats suitable for workstations and interlocking sections available for longer production lines.

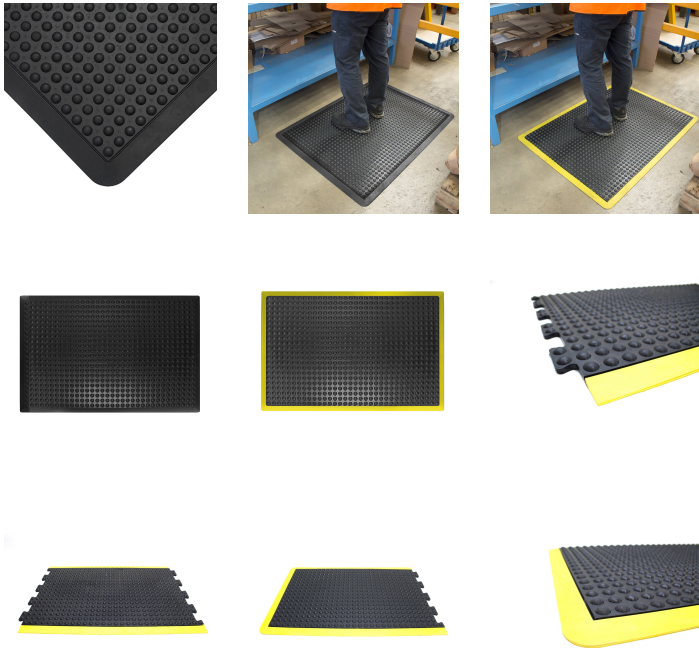

Styles Available



Standard



Safety

Parts

Part Number	Size	Colour	Weight (kg)
BF010001	0.6 m x 0.9 m	Black	6.35
BF010002	0.9 m x 1.2 m	Black	10.5
BF010003	0.6 m x 0.9 m	Black	6.35
BF010004	0.6 m x 0.9 m	Black	6.35

Technical Specifications

Material	Natural rubber
Surface Finish	Bubble
Product Height	14 mm
Product Weight	10 kg
Min. Operating Temperature	-20°C
Max. Operating Temperature	+50°C
Resistance to Chemicals	Not resistant to fat and mineral oil
Environmental Resistance	Suitable for predominantly dry environments
UV Resistance	Yes
Typical Applications	General industrial
Installation Method	Loose lay interlocking mats
Cleaning Method	Use a high pressure hose (not exceeding 60psi) to remove the dirt and debris on the mats. For best results use a mild detergent (pH 4.0-9.0) to clean the mats. Do not use steam or degreasers or caustic chemicals. Do not mechanically scrub the mats
COO (Country of Origin)	LK
Storage and application	Mat should be covered by polythene
Tensile Strength	3 MPa
Elongation	250%
Application Temperature	-30°C to 50°C
Manufacturing process	Compression moulding

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)116 240 1088 or email sales@cobaeurope.com

www.cobaeurope.com