






Plan.a™


Defend against dirt and moisture with versatile aluminium entrance matting




- Robust, high-quality aluminium system for heavy-duty use designed to cope with high footfall.
- Flexible, yet durable PVC linking joints for ease of handling and easy fitting.
- Custom-made to order to your specification.
- Choose from one, or a combination of different surface options.
- Also now available with vibrant coloured needlepunch or needlefelt polypropylene carpet inserts as used our Logomat Precision products.
- Manufactured in the UK.
- Fire tested to BS EN 13501-1 and slip tested to BS 7976-2.

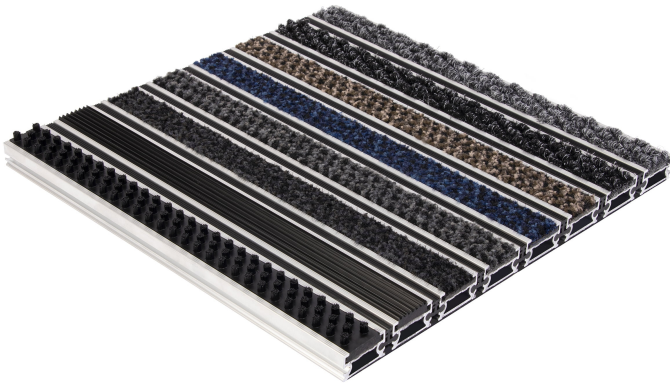


Styles Available




Grey Needlepunch Open



Grey Needlepunch Closed



Charcoal Needlepunch Open




Charcoal Needlepunch Closed




Brown Alba Open




Brown Alba Closed




Grey Alba Open




Grey Alba Closed




Blue Alba Open




Blue Alba Closed




Anthracite Alba Open Low Profile




Anthracite Alba Closed




Scraper Open





Scraper Closed



PVC Brushes Open



PVC Brushes Closed





Assorted Open Low Profile



Assorted Closed

Parts

Part Number	Size	Colour	Weight (kg)
PLANA1	Special	Various	

Technical Specifications

Material	Aluminium rails, PVC connection strips, ECONYL® Regenerated Nylon, PP or PVC inlays
Surface Finish	Carpet, brushes or scrapers
Product Height	10 mm, 17 mm
Durability	Heavy to very heavy traffic entrances
Environmental Resistance	Suitable for wet and dry environments
UV Resistance	Yes
Typical Applications	Entrance areas
Installation Method	Installed in to recessed matwell or surface mounted with ramped edges
Other Product Performance Information	Uniform floor load = 14.36 KN/ m². Wheel load 159 kg per wheel
Fire Tested to	Alba inserts: BS EN 13501-1 Class Cfl - s1. PVC scraper inserts: BS EN 13501-1 Class Cfl - s2.
COO (Country of Origin)	UK
Notes	Alba is a tufted carpet product and therefore its appearance can vary depending on the direction of the pile and the light in the surrounding environment. To achieve a uniform appearance consider Hoovering the product in a single direction.
Slip Tested to	BS 7976-2 - low slip potential

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email sales@cobaeeurope.com

www.cobaeeurope.com